



小型断路器快速选型表

	额定分断能力 Icn (KA)			脱扣特性		额定电流 (A)																极数 (P)													
	4500A 3	6000A 3	10000A 3	A	B	C	D	0.3	0.5	1	1.6	2	3	4	6	8	10	13	16	20	25	32	40	50	63	80	100	125	1P	2P	3P	4P	1P+N (36mm)	3P+N	1P+N (18mm)
5SJ						*		14	5	1	15	2	3	4	6	8	10	13	16	20	25	32	40	50	63				*	*	*	*	*		
							*	14	5	1	15	2	3	4	6	8	10	13	16	20	25	32	40	50	63				*	*	*	*	*		
			4			*		14	5	1	15	2	3	4	6	8	10	13	16	20	25	32	40	50	63				*	*	*	*	*		
			4				*	14	5	1	15	2	3	4	6	8	10	13	16	20	25	32	40	50	63				*	*	*	*	*		
			5			*		14	5	1	15	2	3	4	6	8	10	13	16	20	25	32	40	50	63				*	*	*	*	*		
5SY	3						*	14	5	1	15	2	3	4	6	8	10	13	16	20	25	32	40	50	63				*	*	*	*	*		*
															6		10	13	16	20	25	32	40											*	
	3					*					2		4	6	8	10	13	16	20	25	32	40												*	
		6			*										6		10	13	16	20	25	32	40										*		
5SP						*						2	4	6	8	10	13	16	20	25	32	40												*	
			4																				40	50	63	80	91	92	*	*	*	*	*		

5SJ6、5SP4、5SJ4、5SJ5的右侧可拼装分励脱扣器、欠压脱压器、故障信号接口、故障信号接口等附件
5SP4左侧可拼装5SM2漏电附件



快速选型举例：

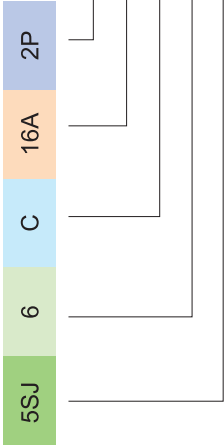



分断能力代码 (6KA)
型号

漏电保护装置快速选型表

注:1P+N,AC型,30mA,6KA为4个缺省参数,选型时可省略。

	型式		脱扣特性		额定电流 (A)										漏电保护类型		额定漏电流 (mA)			额定分断能力 Icn(KA)		
	电磁式	电子式	B	C	6	10	13	16	20	25	32	40				4500A 3	6000A 3	10000A 3				
55U	1		*	*	6	10	13	16	20	25	32	40				10	30	300	*	*	*	
		9		*	6	10		16	20	25	32	40	50	63			30			*	*	

快速选型举例:

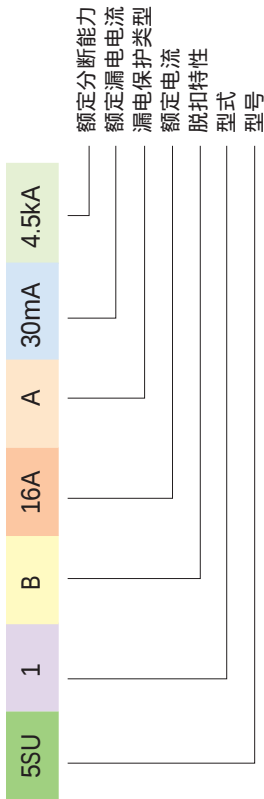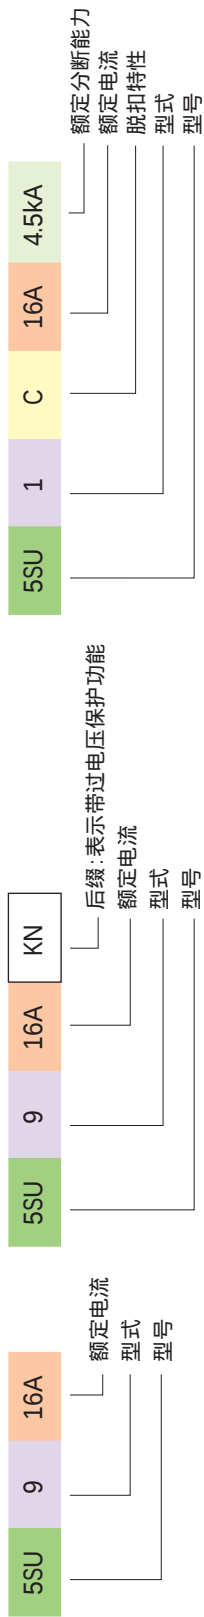

注: AC型, 30mA瞬动为缺省参数。

	额定电流 (A)					极数				漏电保护 类型	额定漏电动作电流 (mA)				选择性参数		
	16	25	40	63	80	1P	2P	3P	4P		10	30	300	500	S	K	I
5SM3							*		*	A	AC						
5SM2			40	63			*	*	*	A	AC	30	300	S			

说明:

冲击耐受电流(8/μs波形): S型-5kA; K型-3kA; I型-1kA。

快速选型举例：

